
PDF

120mm 3000mm RGB LED Edge Frame Lightbox

Installation Guide

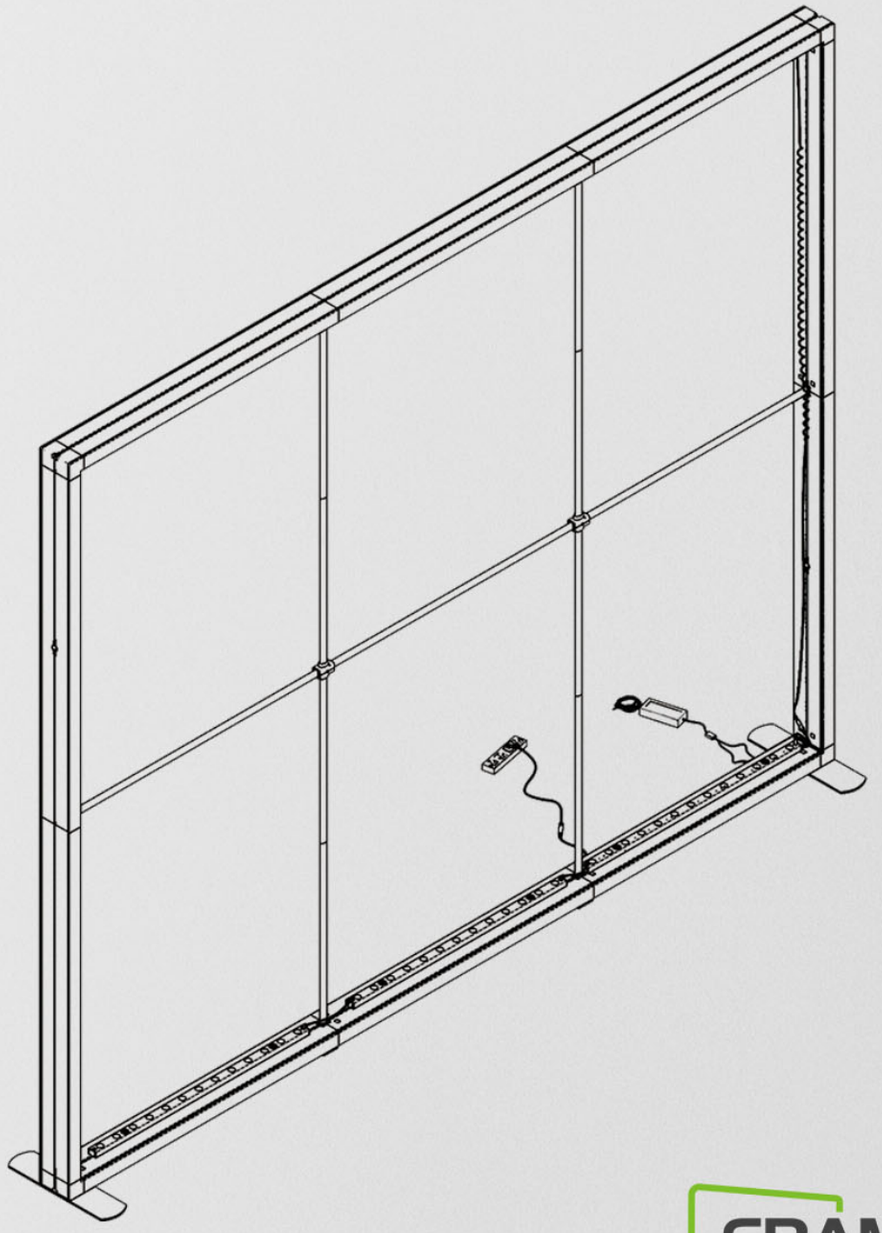


FRAME PLUS

INSTRUCTION


FRAME PLUS



Horizontal Profiles x1
(Power supply)




Horizontal Profiles x1




Horizontal Profiles x2
(Male-Female Connection)



Horizontal Profiles x2
(With a base)
(Male-Female Connection)



Vertical Profiles x1
(Male-Female Connection)




Vertical Profiles x1
(Male-Female Connection)
(Connection hole)



Vertical Profiles x1
(Connection hole)




Vertical Profiles x1




Base profile x2



Right-angle corner profile x2



Support rod x3





Vertical Support Rod x2




Power cord x1

1

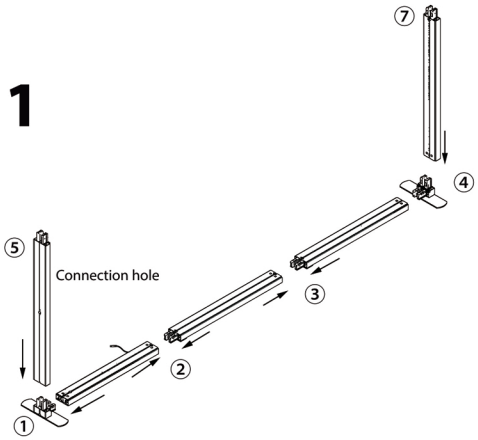


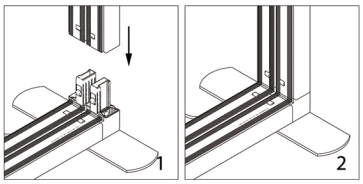

2

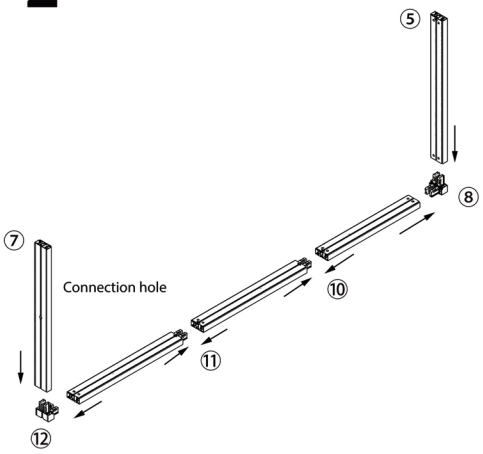



3

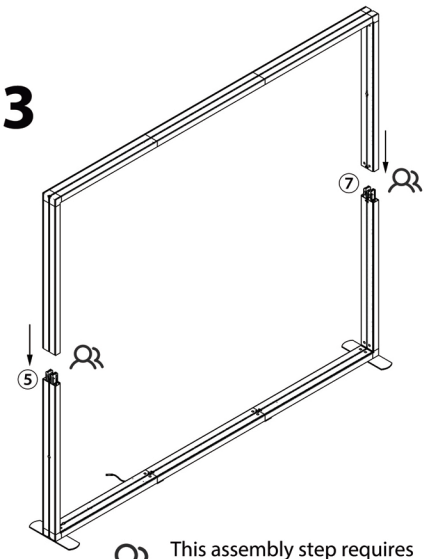

This assembly step requires two people to work together.


4

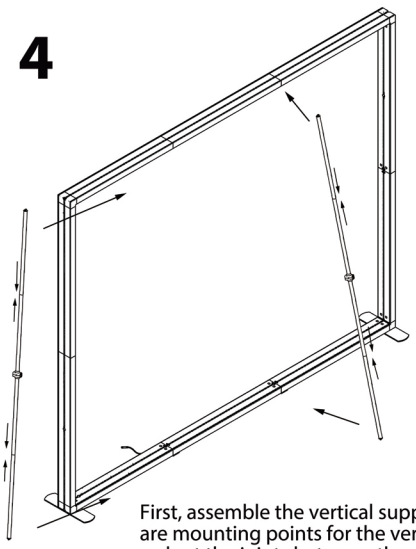


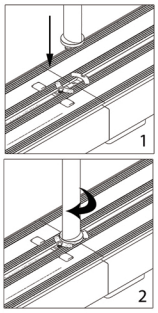


First, assemble the vertical support rods. There are mounting points for the vertical support rods at the joints between the upper and lower profiles; insert the support rods and rotate them 90 degrees to secure them in place.


5

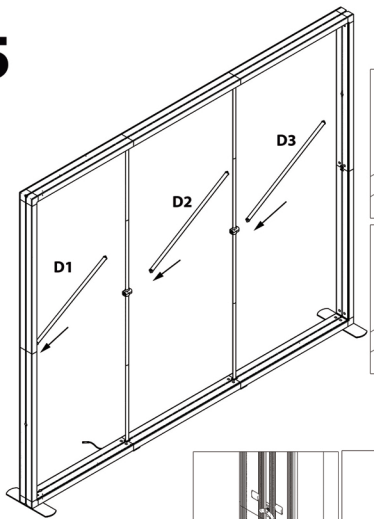

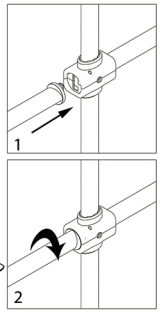

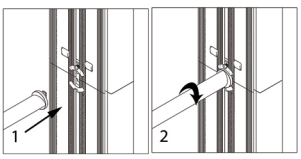

6

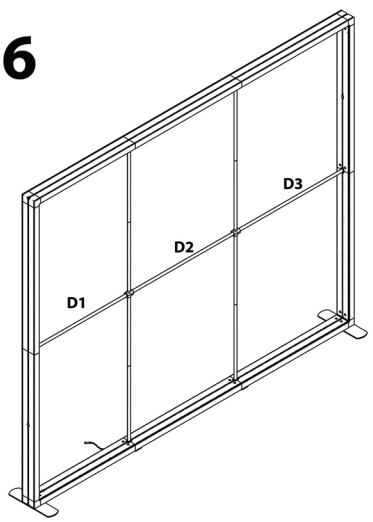


The dimensions of the D1, D2, and D3 horizontal support bars are all different. Before installation, measure the dimensions of the profiles and the vertical support bars, and install the horizontal support bars accordingly.

INSTRUCTION

FRAME PLUS

Optional Features

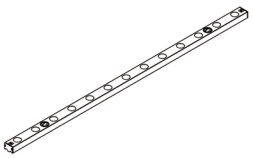

LED strip x6




One-to-Two Spring x1 Connector Cable



Cable clip x6





Dual-male connector cable x4



Power Adapter x1


7

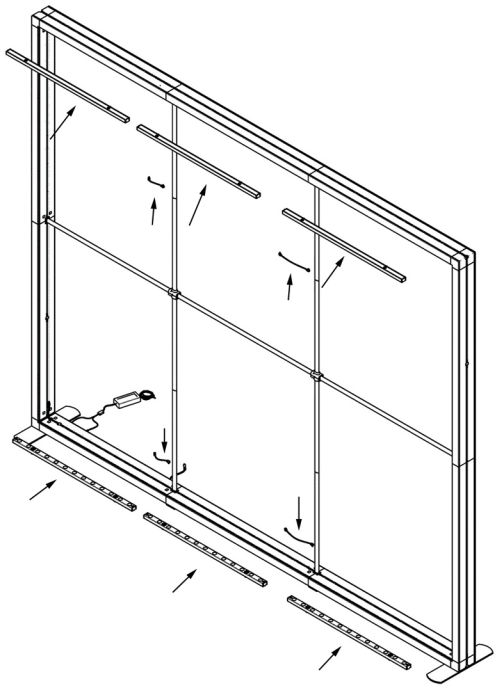

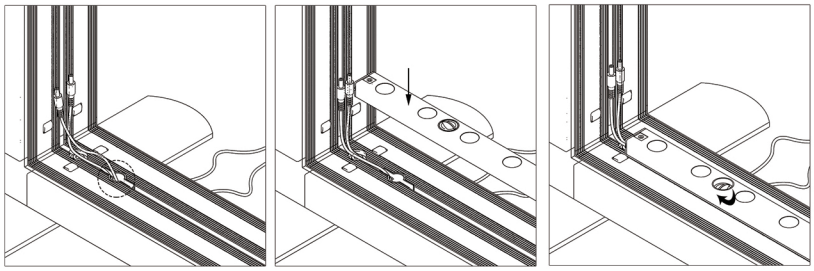


Step 1: Feed the male end of the power adapter cable through the green hole at the bottom of the profile to the top.
Step 2: Install the light strip onto the profile, then press down on the knob on the light strip and rotate it 90° to secure it in place.


8

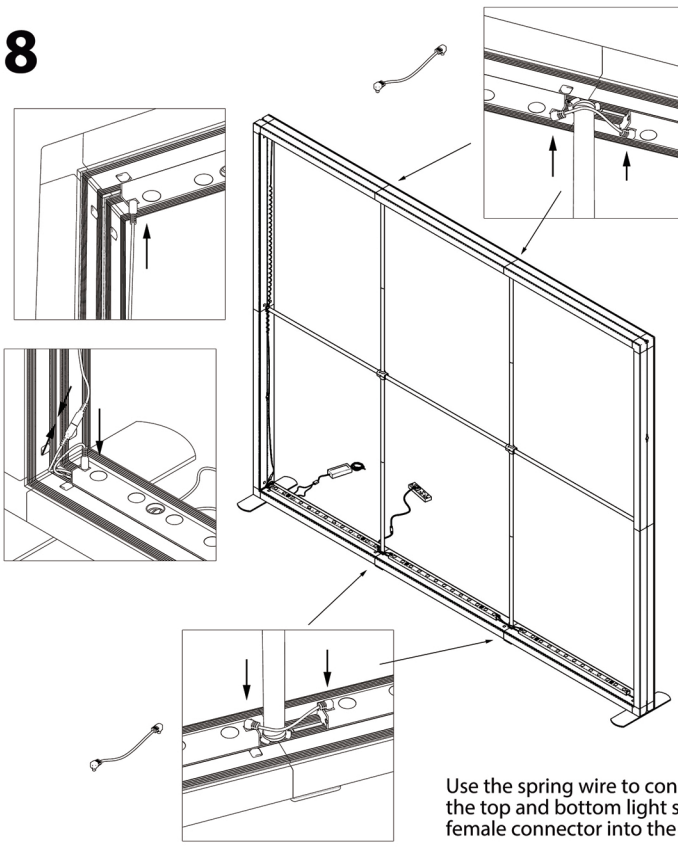

Use the spring wire to connect the male connector to the top and bottom light strips first, then plug the female connector into the power adapter.

9

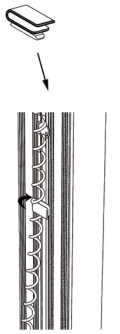

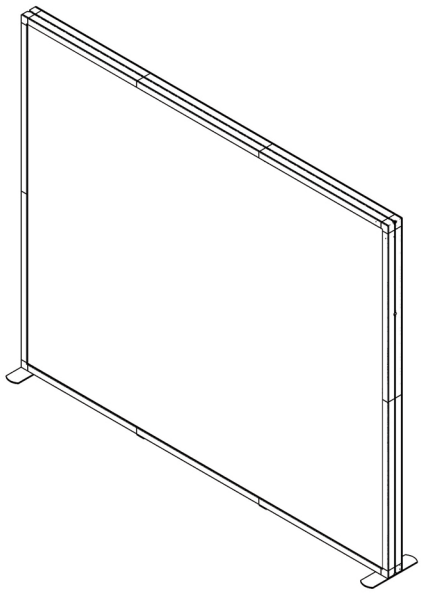

Secure the spring wire to the profile using clips